


NOTES:

1. EACH JOINT TO HAVE 3 GALVANIZED STEEL STRAPS
2. BASE TO BE BURRIED 7' INTO COMPACTED CRUSHED ROCK AND HAVE 6" EXTENDED BASE.
3. OPTIONAL LEDGE, INSERT OR KNOCK OUT PER CUSTOMER REQUEST.

PIECE COUNT:

- 02) 30" x 8' B&S PIPE (4,350 lbs EACH)
- 01) 48" x 8" FLAT TOP w/ 30" center hole (1,500 lbs)
- 01) 48" x 4' SECTION (3,480 lbs)
- 01) 48" x 8' SECTION (6,950 lbs)
- 01) 48" x 8' EXTENDED BASE (8,500 lbs)

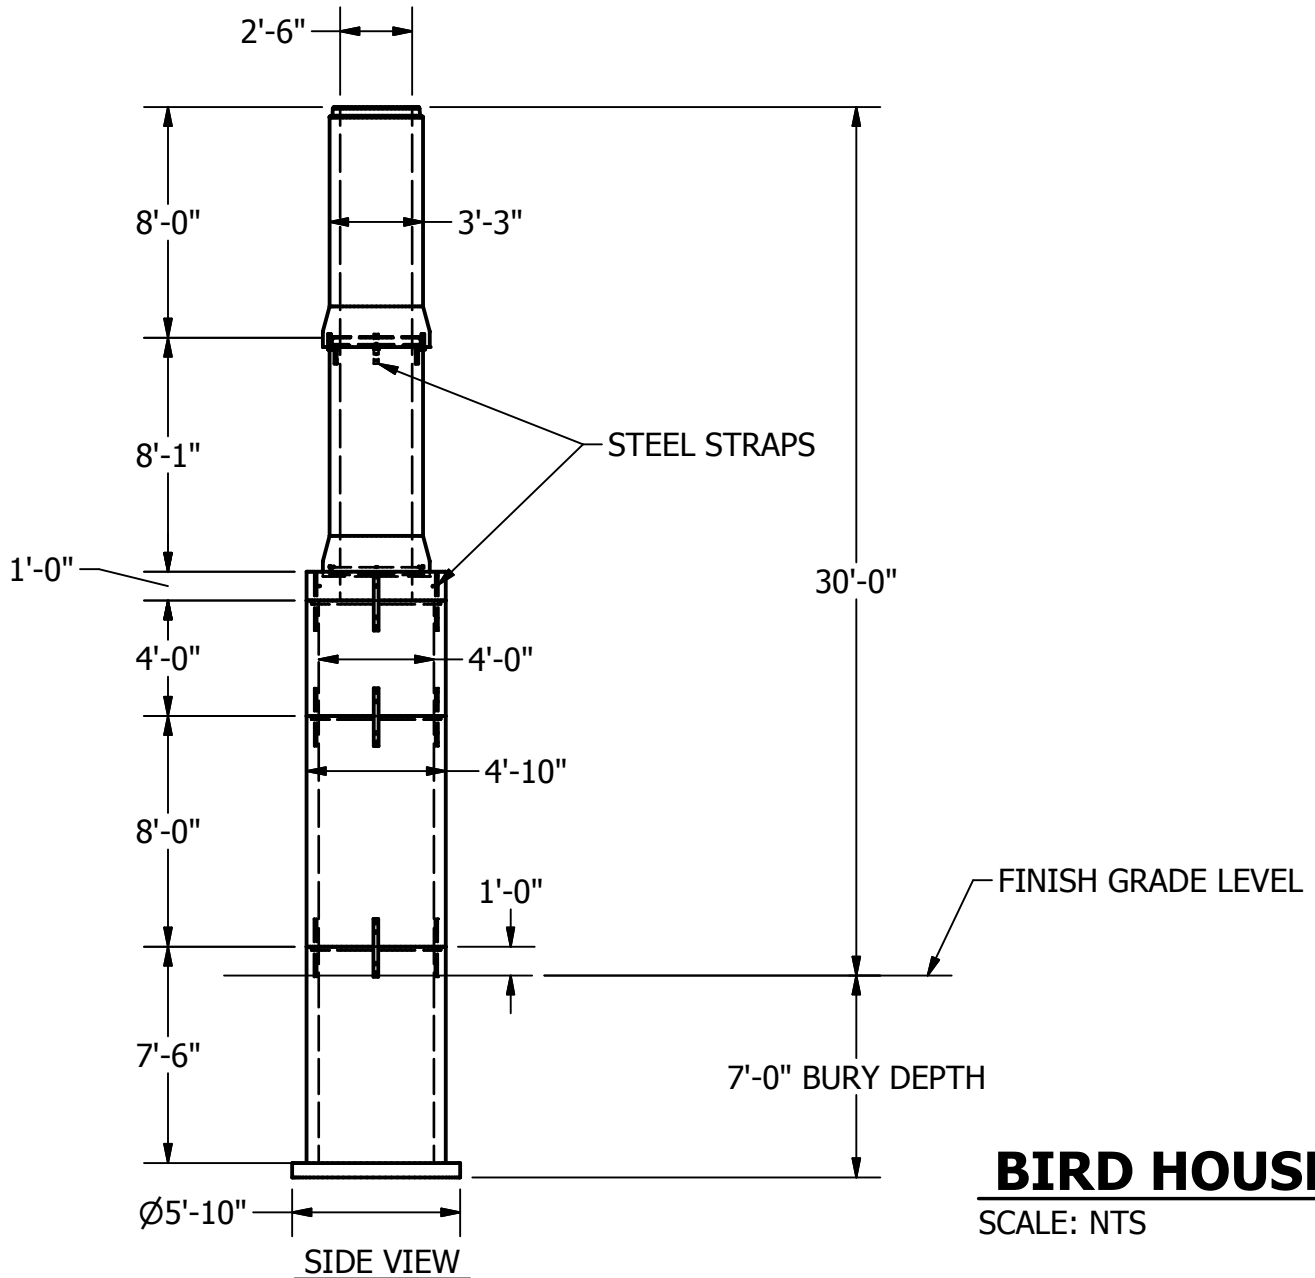

ADVANTAGE PRECAST, INC.
1302 Candlewood Dr. N. Keizer, OR 97307
Phone: (503) 390-2048 Fax: (503) 390-1645

PROJECT: ALBANY BIRD HOUSE				
CONTRACTOR: N/A				
△	xxxx	xxxxxxx	DRAWN EDH	10/30/15
△			CHECKED	
△				B01